

# A.C. adapter DE-20-15

The DE-20-15 desk top adapter has a nominal input voltage 220V/50Hz and output voltage 15VAC. There is a built in transformer with double insulation (class II.). Input adapter cable is equipped with standard flat 220V plug and output cable is also equipped with a connector (see fig. 1). If necessary, it is possible to cut off the output connector and to connect the cable directly to the load terminals. Be careful not to make a short connection on the adapter output when it is switched ON.

The adapter is only suitable for indoor use. It can be fixed to the desired location easily (two mounting holes in the plastic case). There is a built in temperature fuse inside the transformer. If overloaded, the fuse cut off the transformer and the adapter must be repaired in an authorized workshop in such a case. Any unauthorized repairs or modifications are strictly forbidden. Manufacturer does not response for any damages caused with a wrong use of the adapter.

## Specifications:

Input voltage	220VAC to 230V / 50Hz
Output voltage	15VAC / 1A
Load	max. 20VA
Max. environment temperature	45°C
Input cable length	2 m
Output cable length	175 cm
TUV approved	



Complies with the essential requirements of: 73/23/EC Low Voltage Directive - Health and safety protection when is used for its intended purpose. Original of the conformity assessment can be found at the web page [www.jablotron.cz](http://www.jablotron.cz), section Technical support.

*Note: Although this product does not contain any harmful materials we suggest you to return the product to the dealer or directly to the producer after usage.*

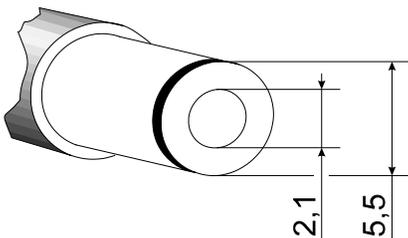


fig. 1 - output connector (all in mm)



Pod Skalkou 33  
466 01 Jablonec nad Nisou  
Czech Republic  
Tel.: +420 483 559 999  
fax: +420 483 559 993  
Internet: [www.jablotron.cz](http://www.jablotron.cz)