

The JK-82 "Oasis" wireless alarm kit

Installation of the JK-82 kit shall only be undertaken by technicians holding a certificate issued by an authorized distributor. This simplified installation manual only describes the basics, for more details see the manuals of particular devices.

1. Factory-default pre-enrolled devices

Address	Device	Note
05	JA-83M door detector	Delayed reaction
06	JA-83P PIR detector	Delayed reaction
48	RC-86 keyfob	Buttons 6 and 7 pre-enrolled
49	JA-81F keypad unit	Connect a magnetic door sensor to its IN input
50	JA-80L indoor siren	

2. Before installation

Have a SIM card ready for the GSM communicator which is activated and does not require a PIN code to register to a GSM network. If it is a prepaid card it should be sufficiently topped up.

3. Control panel and keypad installation

1. **Attach the Control Panel (CP)** to the desired location
2. **Insert the SIM card** into the communicator's SIM card holder.
3. Connect **back-up battery to the CP** (attach it securely with adhesive tape).
4. **Connect the mains** to the CP – its green LED will start flashing
5. The communicator's **red LED** should be lit during registration to the GSM network, and **should turn off within 1 minute**. *If it starts flashing instead, turn off the power (mains & battery) and check that the SIM card functions properly in a mobile phone.*
6. **Connect up the batteries in the JA-81F keypad** – **service mode** should be displayed (if not, disconnect the keypad batteries, check that the keypad panel is powered up and reconnect the keypad batteries).

The internal keypad menu can be entered in Service mode by holding the **?** key. Using the arrows on keys 1 and 7 you can scroll through this menu:

Display	Key	Description
Tamper ON	*	Disable / Enable the tamper sensor (only for service purposes)
Door chime ON	*	Disable / Enable sound when IN triggered
Beeper ON	*	Disable / Enable system sounds
Brightness	◀ ▶	Sets the display brightness 0 - 9



Display	Key	Description
Contrast	◀ ▶	Sets the display contrast 0 - 9
Edit text	*	Entry to keypads text editing
English	*	Sets English (reload default texts)

To exit the menu, press **#** (exiting also occurs after 10 seconds' inactivity).


- If you exit Service mode accidentally, it can be re-entered by keying in *** 0 8080**.
 - Close the keypad's flip cover to save the battery while in the service mode
7. Enter **888** to measure the GSM signal – it should be at least 2/4 (if it is not, find another location for the control panel or try another provider's SIM card).
 8. **Exit GSM measurement mode** by pressing the **#** key.
 9. **Before attaching the JA-81F keypad**, test that it functions correctly at the desired location. We recommended **wiring up a magnetic door sensor** (provided with the kit) to the keypad's IN input. This will ensure that the keypad is "woken up" whenever the door is opened (to indicate system status, to make entrance delay beeps and to have the access card reader ready for reading cards).

4. Installing the detectors and the siren

1. Install the JA-83M magnetic detector, select its reaction via the internal DIP switch (INS/DEL), connect its battery and close the cover.

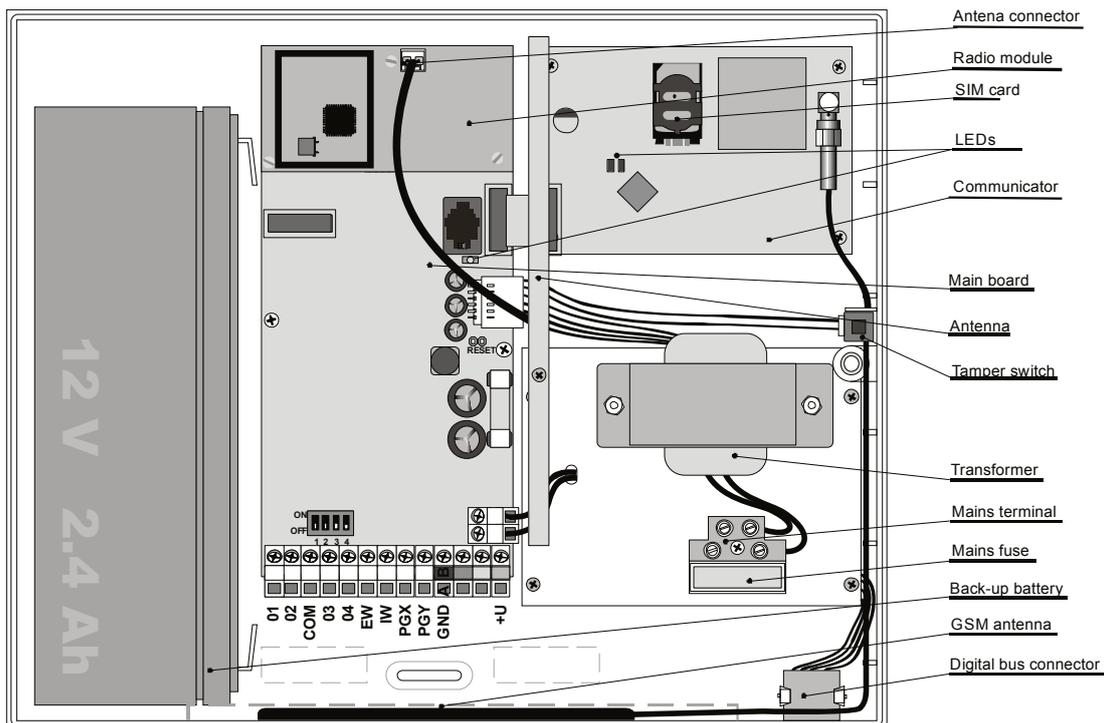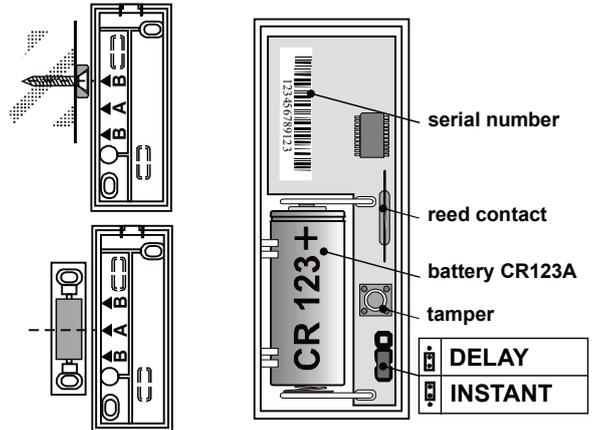

- Install the JA-83P PIR motion detector about 2 to 2.5 meters above the floor, select its reaction via the relevant internal DIP switch (INS/DEL), connect its battery up and close the cover.

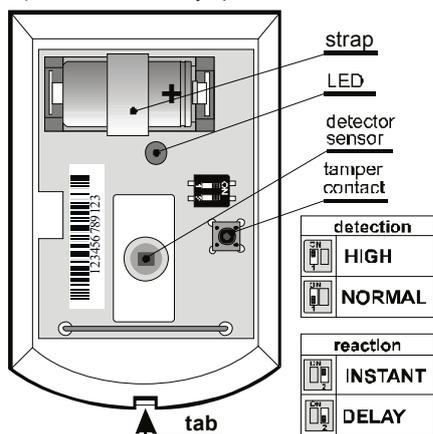

To observe EN 50131-2-2 the battery in the JA-83P must be fixed with the supplied strap and the tabs must be secured by the supplied screw.

- Plug the JA-80L siren into a mains power socket

5. Enrolling more wireless devices

The system can be extended with more wireless devices (a maximum of 50 can be enrolled). To enroll another device, the CP should be in service mode, if it is not enter * 0 8080 (while the system is unset)

- On the keypad, key in 1 to enter enrollment mode
- The next vacant address is displayed (scroll to other addresses using the 1 & 7 keys if desired)
- Connect up the device's battery to enroll the device to the CP. Successful enrollment is confirmed by the A indicator lighting. The next vacant address is then displayed.
 - The RC-86 key-fob can also be enrolled by pressing and holding a pair of its buttons (⬇️ + ⬆️) (or ⬇️ + ○)
- Exit enrollment mode by pressing the # key.
 - To enroll the CP to UC-82 or AC-82 modules, enter 299 while the CP is in service mode with the receiving module in enrollment mode.

6. Testing device functionality

- The CP should be in Service mode, if not enter * 0 8080
- First trigger the device under test (e.g. a detector). The keypad (with its flip cover open) then indicates triggering of the device if the device is functioning correctly and is enrolled.
 - Motion detectors are best tested within 15 minutes of closing their covers as after that they only react to frequent movements once every 5 minutes (to restart a device's test mode, open and close the detector housing again).

7. Checking a device's radio signals

- The CP must have its antenna connected and should be in Service mode, if not enter * 0 8080
- Enter 298, the lowest address with enrolled device will be displayed
- Trigger the device linked to this address – the keypad (with its flip cover open) then shows the device's signal strength in the range ¼ to 4/4 (it should be at least 2/4, if not, relocate the device)
 - Motion detectors are best tested within 15 minutes of closing their covers as after that they only react to frequent movements once every 5 minutes (to restart a device's test mode, open and close the detector housing again).
 - To test the JA-81F keypad signal, trigger the connected magnetic door sensor or activate the keypad's tamper sensor.
 - To test the JA-80L siren signal, press the siren's button.
- To select the next enrolled device address use the 1 & 7 keys.
- To exit signal measurement mode, press the # key.

8. Programming the system

- The CP should be in Service mode, if not enter * 0 8080
- Enter the appropriate programming sequences to select the desired functions (a complete list of them is in the CP and communicator manuals)

Function	Sequence	Note
New service code	5 xxxx xxxx	Factory default: 8080 xxxx = new code
Exit delay	20x	x= multiples of 10 sec. (e.g. 205 = 50 sec). Factory default: 30s
Entrance delay	21x	x= multiples of 5 sec. (e.g. 204 = 20 sec.). Factory default: 20s
Alarm duration	22x	x=1 to 8=1 to 8 minutes 9 = 15min. Factory default: 4 min
Tel. numbers for event reporting to telephones	81 M xx.x *0	M = memory 1 to 8 Factory default reports: M1 & 2 alarms by SMS M3 & 4 alarms by SMS+call M5 & 6 alarms by SMS+call & setting/unsetting by SMS M7 alarms by call M8 faults by SMS xx.x = tel. number 81 M *0 erases memory M
Forwarding of incoming SMSes to the first programmed phone number	801 x	x = 1 enabled (factory def.) x = 0 disabled
Time and date entry	4 hh mm DD MM YY	

9. Testing GSM communication

- Program your mobile phone number to memory M1
- Exit Service mode via the # key and press both buttons on the key-fob to trigger a Panic alarm – an alarm SMS should be sent to your mobile.
- End the Panic alarm by pressing the ⬆️ button on the key-fob.
- Call the SIM card number (it is shown in the alarm SMS report). Wait until the call is answered by the CP (beep in the phone) and enter a valid service code (factory default: 8080)
- Your phone keypad should now work the same way as the system keypad – test it.
- End the call
- Erase your mobile's number from M1 and program it into M8 if you wish to receive reports of technical troubles in the system in future.

10. Editing keypad text strings

- The CP should be in Service mode, if not enter * 0 8080
- Press and hold the ? key to enter editing mode.

Keys: 1 & 7 are for the selection of text strings,
3 & 9 scroll through characters and numbers,
4 & 6 move the cursor,
2 erases the highlighted character,
exits editing mode.

Editing text only affects the text in that particular keypad. A more convenient way of text editing is with a PC running Olink software.

11. Finishing off the installation

- Exit service mode via the # key and demonstrate clearly how to operate the system to the user(s).
- Recommend the user to change the default master 1234 code to a new master code.

Entry	Function
code / card	Setting/unsetting (arming and disarming)
ABC	Complete arming (all sections)
A	Partially setting A (if used)
B	Partially setting AB (if used)
*4	Reading the event memory (4 scrolls backwards)
*5	Changing the MASTER code/card (e.g. *5 1234 2789 2789)
*6	To create a new user code/card (e.g. *6 1234 03 3344 programs user code number 3, to erase the code enter: *6 1234 03 0000)
*7 code/card	To secretly signal operation (unsetting) under duress
*8 a *9	PGX and PGY control (if used)
*0 MASTER code	Maintenance mode (testing, overview of codes, bypassing,...)
#	Exiting maintenance mode or terminating an incomplete entry
?	Displays status details (triggered detectors, fault causes or the status of PG outputs