

Gas leak detector GS-133

The GS-133 detects all mixtures of air and combustible gas (Natural Gas, Methane, Propane, Butane, etc). The detector detects two levels of gas concentration - different output reactions.

The main GS-133 features are: high reliability and sensitivity, compact size and long stability & lifetime.

Installation



A professional installer should install the detector (recommended in compliance with EN 50244).

Fix the detector on the wall. For gases lighter than air (natural gas, city gas etc.) install it close to the ceiling (max 15 cm under it) or directly on the ceiling and on the place expected to have gas leakage. For gases heavier than air (propane, butane, etc.) install it close to the floor or on the lowest place of the room. The detector should not be located close to any obstacles preventing natural air circulation.

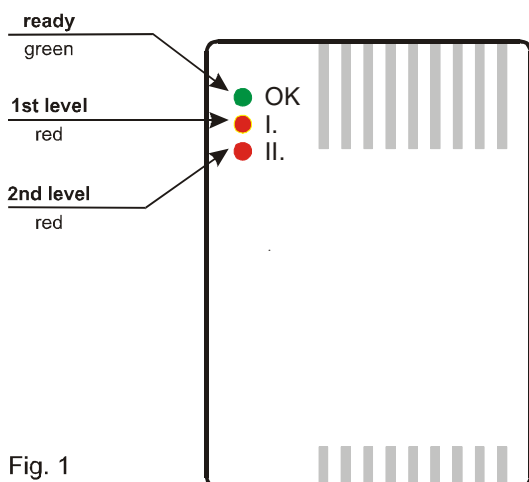


Fig. 1

Output relay function

There is a dry relay contact available on the GS-133 output terminals:

- C** - common contact
- NO** - normally open contact
- NC** - normally closed contact

This relay output can be used for an automatic gas valve closer, alarm system triggering or for other warning systems.

If the **REL jumper** is open, the relay will be triggered after the 1st level of gas concentration is detected. If the REL jumper is closed, the relay will be triggered after the 2nd level of gas concentration is detected.

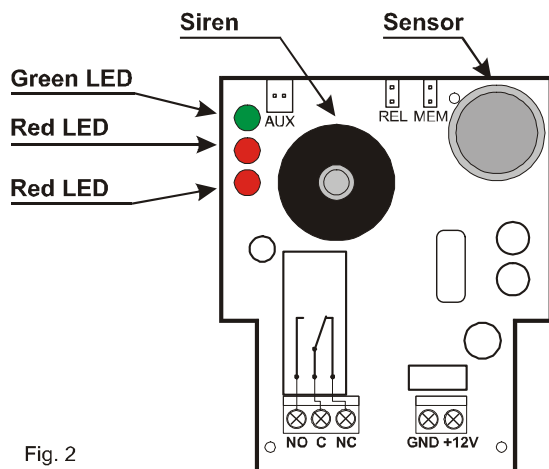


Fig. 2

Function

After switching the power on the green LED will flash for 60 sec. (the detector warms up). When the green indicator lights permanently the detector is ready.

If the gas concentration reaches the 1st level, short beeps will sound and red LED I will go off.

If the gas concentration reaches the 2nd level, long beeps will sound and red LED II will go off.

The output relay reacts depending on the REL jumper setting.

| LED indicators | | |
|----------------|------------------------------------------------------------------------------------|----------------------------------------------------------|
| Green | <ul style="list-style-type: none"> OFF Flashes ON | The detector is off Warming up Ready for gas alarm |
| Red I. | ON | 1 st level of the gas concentration |
| Red II. | ON | 2 nd level of the gas concentration |
| Red II. Green | Alternating flashes | Error in the sensor |

Warning - in the case of a gas alarm stay calm and act as follows: - do not operate any switches

- do not use any kind of phone in the location of the gas leakage

- open any windows

- stop the gas leakage if possible or leave the place and call the gas supply company

Memory

The memory function is disabled by factory default (when the concentration of the gas drops down to normal, the GS-133 will stop the alarm signal).

Close the MEM jumper to select the memory function. Then the alarm indication, if triggered, will not stop unless the GS-133 power supply is terminated for a while.

Maintenance and testing

Keep the detector clean, it is important that its grids should not be blocked with dust.

Use a gas cigarette lighter without the flame lit, to test the gas detector's reaction. The detector will react within 15 seconds.

Professional recalibration of the detector should be done at least once a year. Contact your distributor for more details.

Specification:

Sensitivity:

| | Methane | Propane |
|---------|------------------------------|------------------------------|
| Level 1 | 10±3% LEL (0.50% vol. conc.) | 18±3% LEL (0.30% vol. conc.) |
| Level 2 | 18±3% LEL (0.80% vol. conc.) | 30±3% LEL (0.50% vol. conc.) |

| | Iso-butane |
|---------|------------------------------|
| Level 1 | 23±3% LEL (0.30% vol. conc.) |
| Level 2 | 40±3% LEL (0.50% vol. conc.) |

LEL = Lower Explosive Limit (100 %) according to EN 60079-20-1: for **methane** 4,4 % vol. conc., for **prophane** 1,7 % vol. conc., for **iso-buthane** 1,3 % vol. conc., calibrated by iso-butane

| | |
|---------------------|-----------------------------------------------------------|
| Power supply | 12V DC ± 20% |
| Power consumption | 100 mA (150mA when relay is activated) |
| Detection method | hot platinum filament |
| Buzzer sound level | 94dB/0.3m |
| Relay output | optional for 1st or 2nd level, max. 230V AC/5A |
| Alarm memory | selectable |
| Response time | 20 s |
| Warm up time | approximately 90 s |
| Working environment | indoor use, -10 to +40°C, IP30 |
| Complies with | EN 50194-1, EN 60079-29-1, EN 50130-4, EN 55022 |
| | For non-explosive areas. Zone 2 according to EN 60079-10. |
| | Certified by VVUÚ corp., certificated body No. 3076 |



Complies with the essential requirements of: EMC Directive 2004/108/EC concerning electromagnetic compatibility when used for its intended purpose. The original of the conformity assessment can be found at www.jablotron.com. Technical Support section.



Note: Although this product does not contain any harmful materials we suggest you return the product to the dealer or directly to the producer after use.

JABLOTRON
CREATING ALARMS

JABLOTRON ALARMS a.s.
Pod Skalkou 4567/33
46601 Jablonec nad Nisou
Czech Republic
Tel.: +420 483 559 911
Fax: +420 483 559 993
Internet: www.jablotron.com